


450/750 V 70°C VCT-G

3 CORES - PVC INSULATED AND SHEATHED CABLE, ROUND TYPE FLEXIBLE CONDUCTOR WITH GROUND

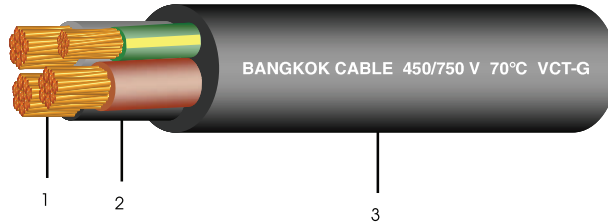

Construction

1. Conductor : Bunch stranded annealed copper
2. Insulation : Polyvinyl chloride (PVC)
Colour code : Phase - Brown, Black, Grey
Ground - Green/Yellow
3. Sheath : Polyvinyl chloride (PVC), Black colour

Standard :

TIS 11 Part 101-2559



Classification

- Maximum conductor temperature : 70°C
Rated Voltage : 450/750 V
AC test voltage : 2,500 V

Application

- Use for general purpose
- Use for connecting electric appliance
- Laid on cable trays
- Install in duct in ground or direct burial in ground

Products code	Conductor						Thickness of insulation		Thickness of sheath	Overall diameter	Insulation resistance at 70°C	Current rating in free air	Cable weight	Standard length
	Cross-sectional area		Dia. of wires		Diameter									
	mm ²	mm (Max.)	mm (Approx.)	mm	mm (Max.)	MΩ.km (Min.)	A	kg/km (Approx.)						
	Phase	Ground	Phase	Ground	Phase	Ground	Phase	Ground						
C6P303744012	1	1	0.21	0.21	1.31	1.31	0.8	0.8	1.4	11.5	0.0127	10	160	100/C
C6P3038N4012	1.5	1.5	0.26	0.26	1.58	1.58	0.8	0.8	1.4	12.5	0.0111	16	190	100/C
C6P3032P4012	2.5	2.5	0.26	0.26	2.04	2.04	0.8	0.8	1.4	14.0	0.0092	25	250	100/C
C6P303824012	4	4	0.31	0.31	2.59	2.59	0.9	0.9	1.8	17.0	0.0084	26	380	100/C
C6P303854012	6	6	0.31	0.31	3.60	3.60	0.9	0.9	2.0	19.5	0.0071	34	540	100/C
C6P303884011	10	10	0.41	0.41	4.79	4.79	1.1	1.1	2.2	24.0	0.0068	47	860	500/D
C6P303924011	16	16	0.41	0.41	5.88	5.88	1.1	1.1	2.6	28.0	0.0050	63	1,220	500/D
C6P303954011	25	16	0.41	0.41	7.32	5.88	1.3	1.1	2.8	33.0	0.0048	83	1,670	500/D
C6P303984011	35	16	0.41	0.41	8.61	5.88	1.3	1.1	3.1	37.0	0.0041	102	2,110	500/D

C = Packing in coil

D = Packing in drum