



## Luminaire Disconnects

- Polyamide (PA), UL 94V-0 flame retardant shell rated at 105°C (UL).
- High conductivity tin-plated copper terminals.
- Allows safe disconnect of hot and neutral ballast or LED driver wiring.
- Gripping ribs surrounding the surface of connector provide more grasp for easy connections.
- Pull apart to separate halves easily and safely.
- Designed for OEM new lighting installation or retrofit lighting application.
- UL 2459 Listed for the U.S. and Canada.

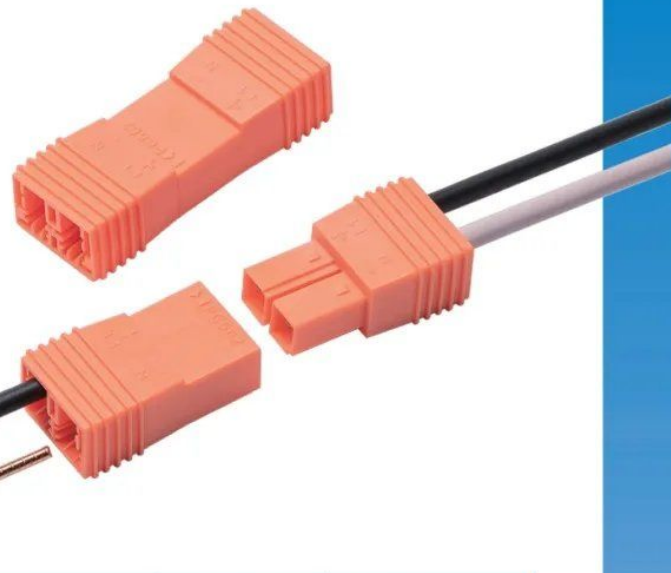

| Dimensions (mm)                                                                    | Cat. No.     | Color  | Poles | Electrical Ratings & Wire Range (Cu)                                   | Approvals                                                                            | Packing                               |
|------------------------------------------------------------------------------------|--------------|--------|-------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------|
|  | <b>PC562</b> | Orange | 2     | 6A, 600V, 105°C (221°F)<br>18 AWG, Sol<br>18 AWG, Tin bonded Str       |  | Carton of 5,000<br>(10 bags, 500 ea.) |
|                                                                                    |              |        |       | 3A, 600V, 105°C (221°F)<br>22-18 AWG, Sol<br>22-18 AWG, Tin bonded Str |                                                                                      |                                       |



### « Application »

