

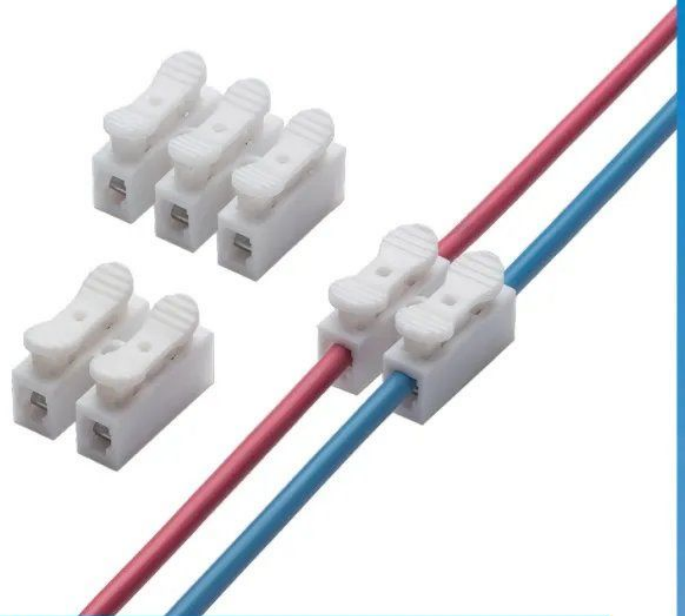


Push-Button Terminal Blocks

- Polypropylene (PP), UL 94V-2 flame-retardant housing rated at T85 (CQC).
- Spring force connector constructed from tinned steel plate with brass plate and stainless steel plate.
- Easy to assemble and disassemble wires by pressing the button.
- Suitable for lighting wiring from 0,5 to 2,5 mm².
- Can be reused.
- Certified to GB/T13140.



Dimensions (mm)	Cat. No.	Color	No. of Poles	Electrical Ratings & Wire Range (Cu)	Approvals	Packing
	PA92	White	2	10A, 250V, T85°C 0,5-2,5 mm ² , Rigid/Flex	CE ccc	Carton of 3,000 (10 bags, 300 ea.)
	PA93	White	3	10A, 250V, T85°C 0,5-2,5 mm ² , Rigid/Flex	CE ccc	Carton of 2,000 (10 bags, 200 ea.)

