


Strain Relief Bushings

- Thermoplastic material, flame retardant according to UL 94V-2.
- Maximum temperature on part not to exceed 75°C (167°F).
- Secure and protect power cords from being damaged by chassis.
- For use at the entry points of electrical and lighting fixtures.
- Assembly tool is available upon request.



Cross Section Shape	Cat. No.	UL Wires Accommodated	Approx. Wire Size (mm)	Mounting Hole		Max. Thickness C mm	Length D mm	Approval	Packing	
				A mm	B mm				Bag	Carton
Flat (Black)	2P-4	SPT-1	3X5.6	9.5	8.7	1.6	10.4		1,000	20,000
	3P-4	SPT-1	3X5.6	11.0	9.9	1.6	10.4		1,000	10,000
	3W-1	SPT-1	3x5.6	11.0	9.9	2.5	10.4		1,000	10,000
	4N-4	SPT-2	$\frac{3.71}{3.8 \times 7.6}$	12.7-13.1	11.8	1.6	10.4		1,000	10,000
	4K-4	SPT-2	$\frac{3.71}{3.8 \times 7.6}$	12.7-13.1	11.8	2.5	10.4		1,000	10,000
Round (Black)	5N-4	SVI / SVT	6.4Ø-7.4Ø	12.7-13.1	11.5	1.6	11.0		1,000	10,000
	5P-4	SVI / SVT	6.4Ø-7.4Ø	12.7-13.1	11.5	2.5	11.0		1,000	10,000
	6N-4	SJT 3C #18	7.6Ø	15.9	14.0	1.6	14.8		500	5,000
	6P-4	SJT 3C #18	7.6Ø	15.9	14.0	3.2	14.8		500	5,000
	6N3-4	SJT 3C #16	8.2Ø-9.2Ø	15.9	14.0	1.6	14.9		500	5,000
	6P3-4	SJT 3C #16	8.2Ø-9.2Ø	15.9	14.0	3.2	14.8		500	5,000
	7N-2	SJT 3C #14	$\frac{9.2Ø-10.5Ø}{11.0Ø}$	$\frac{19.0}{19.8}$	16.8	1.6	19.3		100	2,000
	7P-2	SJT 3C #14	$\frac{9.2Ø-10.5Ø}{11.0Ø}$	$\frac{19.0}{19.8}$	16.8	3.2	19.3		100	2,000

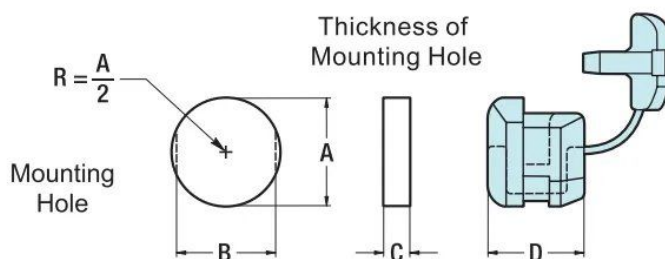

RoHS
Compliant

REACH
Compliant

Assembly Tool
NO. 1



Assembly Procedure:

