


Terminal Blocks, PP & Steel Type

- Polypropylene (PP), UL 94V-2 flame retardant housing rated at T85 (IEC) and 65°C (UL).
- Metal parts feature steel screws and zinc-plated steel contacts.
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- U-shaped contacts permit easy wire insertion—accept up to 5 types of conductors.
- Easy cutting design makes it easier to be cut into desired number of poles.
- Certified to IEC/EN 60998 and Recognized to UL 1059.

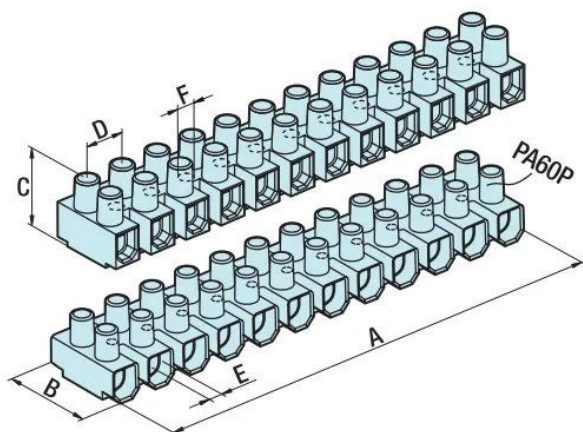

Cat. No.	Dimensions (mm/inches)							Screw
	Unit	A	B	C	D	ØE	ØF	
PA20P	mm	96.20	17.00	14.50	8.20	3.10	2.90	M2.6x5
	in.	3.787	0.669	0.571	0.323	0.122	0.114	
PA30P	mm	116.8	19.20	16.70	10.00	3.40	3.60	M3x6
	in.	4.598	0.756	0.657	0.394	0.133	0.142	
PA40P	mm	140.5	23.50	18.70	12.00	4.50	3.90	M3.5x7
	in.	5.531	0.925	0.736	0.472	0.177	0.154	
PA50P	mm	169.8	25.00	20.80	14.50	6.50	4.30	M4x9
	in.	6.685	0.984	0.819	0.571	0.256	0.169	
PA60P	mm	192.9	36.00	26.10	16.50	7.00	4.20	M5x11
	in.	7.594	1.417	1.027	0.645	0.275	0.165	

Cat. No.	Clamping Area	Color	No. of Poles	Electrical Ratings & Wire Range (Cu)	Approvals	Packing
PA20P	4 mm ²	White / Black	12	32A, 450V, T85°C 0.5-4 mm ² , Rigid/Flex	CE DVE NF UK CA FI CEC	Carton of 500 (10 bags, 50 ea.)
				20A, 300V, 65°C (149°F) 22-12 AWG, Sol/Str	UL US	
PA30P	6 mm ²	White / Black	12	41A, 450V, T85°C 1-6 mm ² , Rigid/Flex	CE DVE NF UK CA FI CEC	Carton of 500 (10 bags, 50 ea.)
				25A, 300V, 65°C (149°F) 22-10 AWG, Sol 14-10 AWG, Str	UL US	
PA40P	10 mm ²	White / Black	12	57A, 500V, T85°C 2.5-10 mm ² , Rigid/Flex	CE DVE NF UK CA FI CEC	Carton of 400 (10 bags, 40 ea.)
				30A, 300V, 65°C (149°F) 18-10 AWG, Sol 16-10 AWG, Str	UL US	
PA50P	16 mm ²	White / Black	12	76A, 450V, T85°C 4-16 mm ² , Rigid/Flex	CE DVE NF UK CA FI	Carton of 250 (10 bags, 25 ea.)
PA60P	25 mm ²	White / Black	12	101A, 750V, T85°C 10-25 mm ² , Rigid 6-16 mm ² , Flex	CE DVE NF UK CA FI CEC	Carton of 100 (10 bags, 10 ea.)