


CVV or CVV-S

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH WITH SHIELD CONTROL CABLE

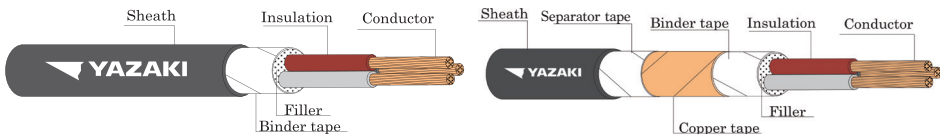

CABLE STRUCTURE

Conductor : Flexible annealed copper
Insulation : Polyvinyl chloride (PVC)
Insulation color **2 Cores** : Blue and Brown
3 Cores : Brown, Black, Grey
4 Cores : Blue, Brown, Black, Grey
More than 4 Cores :
 Black with marking numbers, colored white,
 printed continuously throughout the whole
 length of insulated wires for the purpose of
 core identification.

Filler : Non-hygroscopic material
Binder tape and Separator tape : Non-hygroscopic tape
Shield (for CVV-S cable) : Copper tape
Sheath : Black polyvinyl chloride (PVC)

TECHNICAL DATA

Classification : Maximum conductor temperature 70°C
 : Circuit voltage no exceeding 600 Volts
AC Testing voltage : 2,000 Volts
Reference standard : THAI YAZAKI STANDARD

APPLICATION

For supervisory electrical equipment, station control circuits, outdoor, suitable installation in the dry or wet cable trenches.

Number of core	Nominal cross sectional area (mm ²)	Conductor type	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ω/km)	Insulation resistance at 70°C minimum (MΩ·km)	Cable weight approx. (kg/km)	Standard Length (m)
2	0.5	Flexible	0.6	1.2	9.0	39.0	0.0130	80	300/D
	0.75	Flexible	0.6	1.2	9.5	26.0	0.0114	89	300/D
	1	Flexible	0.6	1.2	9.5	19.5	0.0104	100	300/D
	1.5	Flexible	0.6	1.2	10.0	13.3	0.0089	112	300/D
	2.5	Flexible	0.7	1.2	11.5	7.98	0.0081	154	300/D
	4	Flexible	0.8	1.2	13.0	4.95	0.0076	212	300/D
3	6	Flexible	0.8	1.4	15.0	3.30	0.0061	293	300/D
	0.5	Flexible	0.6	1.2	9.0	39.0	0.0130	91	300/D
	0.75	Flexible	0.6	1.2	9.5	26.0	0.0114	103	300/D
	1	Flexible	0.6	1.2	10.0	19.5	0.0104	115	300/D
	1.5	Flexible	0.6	1.2	10.5	13.3	0.0089	132	300/D
	2.5	Flexible	0.7	1.2	11.5	7.98	0.0081	184	300/D
4	4	Flexible	0.8	1.4	14.0	4.95	0.0076	274	300/D
	6	Flexible	0.8	1.4	15.5	3.30	0.0061	370	300/D
	0.5	Flexible	0.6	1.2	10.0	39.0	0.0130	101	300/D
	0.75	Flexible	0.6	1.2	10.5	26.0	0.0114	117	300/D
	1	Flexible	0.6	1.2	10.5	19.5	0.0104	138	300/D
	1.5	Flexible	0.6	1.2	11.0	13.3	0.0089	159	300/D
5	2.5	Flexible	0.7	1.2	12.5	7.98	0.0081	223	300/D
	4	Flexible	0.8	1.4	15.0	4.95	0.0076	334	300/D
	6	Flexible	0.8	1.4	17.0	3.30	0.0061	462	300/D
	0.5	Flexible	0.6	1.2	10.5	39.0	0.0130	118	300/D
	0.75	Flexible	0.6	1.2	11.0	26.0	0.0114	138	300/D
	1	Flexible	0.6	1.2	11.5	19.5	0.0104	158	300/D
6	1.5	Flexible	0.6	1.2	12.0	13.3	0.0089	189	300/D
	2.5	Flexible	0.7	1.4	14.0	7.98	0.0081	280	300/D
	4	Flexible	0.8	1.4	16.5	4.95	0.0076	402	300/D
	6	Flexible	0.8	1.4	18.5	3.30	0.0061	557	300/D

D = Packing in drum

CVV or CVV-S

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH WITH SHIELD CONTROL CABLE

Number of core	Nominal cross sectional area (mm ²)	Conductor type	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ω/km)	Insulation resistance at 70°C minimum (MΩ-km)	Cable weight approx. (kg/km)	Standard Length (m)
6	0.5	Flexible	0.6	1.2	11.5	39.0	0.0130	134	300/D
	0.75	Flexible	0.6	1.2	12.0	26.0	0.0114	158	300/D
	1	Flexible	0.6	1.2	12.0	19.5	0.0104	182	300/D
	1.5	Flexible	0.6	1.2	13.0	13.3	0.0089	214	300/D
	2.5	Flexible	0.7	1.4	15.0	7.98	0.0081	326	300/D
	4	Flexible	0.8	1.4	18.0	4.95	0.0076	473	300/D
7	0.5	Flexible	0.6	1.2	11.5	39.0	0.0130	142	300/D
	0.75	Flexible	0.6	1.2	12.0	26.0	0.0114	168	300/D
	1	Flexible	0.6	1.2	12.0	19.5	0.0104	194	300/D
	1.5	Flexible	0.6	1.2	13.0	13.3	0.0089	229	300/D
	2.5	Flexible	0.7	1.4	15.0	7.98	0.0081	351	300/D
	4	Flexible	0.8	1.4	18.0	4.95	0.0076	513	300/D
8	0.5	Flexible	0.6	1.2	12.0	39.0	0.0130	161	300/D
	0.75	Flexible	0.6	1.2	12.5	26.0	0.0114	191	300/D
	1	Flexible	0.6	1.2	13.0	19.5	0.0104	223	300/D
	1.5	Flexible	0.6	1.4	14.5	13.3	0.0089	276	300/D
	2.5	Flexible	0.7	1.4	16.5	7.98	0.0081	405	300/D
	4	Flexible	0.8	1.4	19.5	4.95	0.0076	594	300/D
9	0.5	Flexible	0.6	1.2	12.0	39.0	0.0130	174	300/D
	0.75	Flexible	0.6	1.2	13.5	26.0	0.0114	207	300/D
	1	Flexible	0.6	1.4	14.0	19.5	0.0104	254	300/D
	1.5	Flexible	0.6	1.4	15.5	13.3	0.0089	300	300/D
	2.5	Flexible	0.7	1.4	17.5	7.98	0.0081	454	300/D
	4	Flexible	0.8	1.4	20.5	4.95	0.0076	663	300/D
10	0.5	Flexible	0.6	1.2	12.5	39.0	0.0130	191	300/D
	0.75	Flexible	0.6	1.2	13.5	26.0	0.0114	249	300/D
	1	Flexible	0.6	1.4	15.0	19.5	0.0104	288	300/D
	1.5	Flexible	0.6	1.4	16.5	13.3	0.0089	340	300/D
	2.5	Flexible	0.7	1.4	18.5	7.98	0.0081	500	300/D
	4	Flexible	0.8	1.4	22.0	4.95	0.0076	732	300/D
11	0.5	Flexible	0.6	1.2	13.5	39.0	0.0130	200	300/D
	0.75	Flexible	0.6	1.4	14.5	26.0	0.0114	253	300/D
	1	Flexible	0.6	1.4	15.0	19.5	0.0104	295	300/D
	1.5	Flexible	0.6	1.4	16.5	13.3	0.0089	351	300/D
	2.5	Flexible	0.7	1.4	18.5	7.98	0.0081	525	300/D
	4	Flexible	0.8	1.4	22.0	4.95	0.0076	767	300/D
12	0.5	Flexible	0.6	1.2	13.5	39.0	0.0130	227	300/D
	0.75	Flexible	0.6	1.4	15.0	26.0	0.0114	270	300/D
	1	Flexible	0.6	1.4	15.5	19.5	0.0104	323	300/D
	1.5	Flexible	0.6	1.4	17.0	13.3	0.0089	382	300/D
	2.5	Flexible	0.7	1.4	19.5	7.98	0.0081	568	300/D
	4	Flexible	0.8	1.4	23.0	4.95	0.0076	855	300/D
13	0.5	Flexible	0.6	1.2	13.5	39.0	0.0130	1256	300/D
	0.75	Flexible	0.6	1.4	15.0	26.0	0.0114	294	300/D
	1	Flexible	0.6	1.4	16.5	19.5	0.0104	343	300/D
	1.5	Flexible	0.6	1.4	17.5	13.3	0.0089	405	300/D
	2.5	Flexible	0.7	1.4	20.0	7.98	0.0081	603	300/D
	4	Flexible	0.8	1.4	24.0	4.95	0.0076	915	300/D
14	0.5	Flexible	0.6	1.2	13.5	39.0	0.0130	1344	300/D
	0.75	Flexible	0.6	1.4	15.0	26.0	0.0114	247	300/D
	1	Flexible	0.6	1.4	16.5	19.5	0.0104	297	300/D
	1.5	Flexible	0.6	1.4	17.5	13.3	0.0089	349	300/D
	2.5	Flexible	0.7	1.4	20.0	7.98	0.0081	416	300/D
	4	Flexible	0.8	1.4	24.0	4.95	0.0076	626	300/D
15	0.5	Flexible	0.6	1.2	13.5	39.0	0.0130	939	300/D
	0.75	Flexible	0.6	1.4	15.0	26.0	0.0114	1394	300/D

Remark : Thermal resistivity of soil 1.2 K.m/W or °C.m/W
 Deep of laying (For cable laid direct in ground) 0.8 m
 Shield bonded at single point

CVV or CVV-S

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH WITH SHIELD CONTROL CABLE

Number of core	Normal cross sectional area (mm ²)	Conductor type	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ω/km)	Insulation resistance at 70°C minimum (MΩ-km)	Cable weight approx. (kg/km)	Standard Length (m)
15	0.5	Flexible	0.6	1.4	15.5	39.0	0.0130	260	300/D
	0.75	Flexible	0.6	1.4	16.5	26.0	0.0114	317	300/D
	1	Flexible	0.6	1.4	17.0	19.5	0.0104	372	300/D
	1.5	Flexible	0.6	1.4	18.0	13.3	0.0089	444	300/D
	2.5	Flexible	0.7	1.4	21.0	7.98	0.0081	672	300/D
	4	Flexible	0.8	1.8	26.0	4.95	0.0076	1061	300/D
16	0.5	Flexible	0.6	1.4	15.5	39.0	0.0130	273	300/D
	0.75	Flexible	0.6	1.4	16.5	26.0	0.0114	329	300/D
	1	Flexible	0.6	1.4	17.0	19.5	0.0104	387	300/D
	1.5	Flexible	0.6	1.4	18.5	13.3	0.0089	464	300/D
	2.5	Flexible	0.7	1.4	21.0	7.98	0.0081	702	300/D
	4	Flexible	0.8	1.8	26.5	4.95	0.0076	1108	300/D
17	0.5	Flexible	0.6	1.4	16.5	39.0	0.0130	291	300/D
	0.75	Flexible	0.6	1.4	17.5	26.0	0.0114	362	300/D
	1	Flexible	0.6	1.4	18.0	19.5	0.0104	424	300/D
	1.5	Flexible	0.6	1.4	19.5	13.3	0.0089	505	300/D
	2.5	Flexible	0.7	1.4	22.5	7.98	0.0081	771	300/D
	4	Flexible	0.8	1.8	27.5	4.95	0.0076	1202	300/D
18	0.5	Flexible	0.6	1.4	16.5	39.0	0.0130	300	300/D
	0.75	Flexible	0.6	1.4	17.5	26.0	0.0114	363	300/D
	1	Flexible	0.6	1.4	18.0	19.5	0.0104	428	300/D
	1.5	Flexible	0.6	1.4	19.5	13.3	0.0089	514	300/D
	2.5	Flexible	0.7	1.4	22.5	7.98	0.0081	780	300/D
	4	Flexible	0.8	1.8	27.5	4.95	0.0076	1219	300/D
19	0.5	Flexible	0.6	1.4	16.5	39.0	0.0130	307	300/D
	0.75	Flexible	0.6	1.4	17.5	26.0	0.0114	372	300/D
	1	Flexible	0.6	1.4	18.0	19.5	0.0104	440	300/D
	1.5	Flexible	0.6	1.4	19.5	13.3	0.0089	529	300/D
	2.5	Flexible	0.7	1.4	22.5	7.98	0.0081	805	300/D
	4	Flexible	0.8	1.8	27.5	4.95	0.0076	1258	300/D
20	0.5	Flexible	0.6	1.4	16.5	39.0	0.0130	319	300/D
	0.75	Flexible	0.6	1.4	17.5	26.0	0.0114	387	300/D
	1	Flexible	0.6	1.4	18.0	19.5	0.0104	458	300/D
	1.5	Flexible	0.6	1.4	20.0	13.3	0.0089	553	300/D
	2.5	Flexible	0.7	1.4	23.0	7.98	0.0081	847	300/D
	4	Flexible	0.8	1.8	28.5	4.95	0.0076	1330	300/D
21	0.5	Flexible	0.6	1.4	17.0	39.0	0.0130	333	300/D
	0.75	Flexible	0.6	1.4	18.0	26.0	0.0114	405	300/D
	1	Flexible	0.6	1.4	18.5	19.5	0.0104	480	300/D
	1.5	Flexible	0.6	1.4	20.0	13.3	0.0089	579	300/D
	2.5	Flexible	0.7	1.4	23.5	7.98	0.0081	883	300/D
	4	Flexible	0.8	1.8	29.0	4.95	0.0076	1385	300/D
22	0.5	Flexible	0.6	1.4	18.0	39.0	0.0130	353	300/D
	0.75	Flexible	0.6	1.4	19.0	26.0	0.0114	430	300/D
	1	Flexible	0.6	1.4	19.5	19.5	0.0104	511	300/D
	1.5	Flexible	0.6	1.4	21.0	13.3	0.0089	615	300/D
	2.5	Flexible	0.7	1.8	25.5	7.98	0.0081	990	300/D
	4	Flexible	0.8	1.8	30.5	4.95	0.0076	1467	300/D
23	0.5	Flexible	0.6	1.4	18.0	39.0	0.0130	360	300/D
	0.75	Flexible	0.6	1.4	19.0	26.0	0.0114	439	300/D
	1	Flexible	0.6	1.4	19.5	19.5	0.0104	522	300/D
	1.5	Flexible	0.6	1.4	21.0	13.3	0.0089	630	300/D
	2.5	Flexible	0.7	1.8	25.5	7.98	0.0081	1017	300/D
	4	Flexible	0.8	1.8	30.5	4.95	0.0076	1512	300/D
	6	Flexible	0.8	1.8	35.0	3.30	0.0061	2154	300/D

D = Packing in drum

CVV or CVV-S

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH WITH SHIELD CONTROL CABLE

Number of core	Normal cross sectional area (mm ²)	Conductor type	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ω/km)	Insulation resistance at 70°C minimum (MΩ-km)	Cable weight approx. (kg/km)	Standard Length (m)
24	0.5	Flexible	0.6	1.4	18.5	39.0	0.0130	379	300/D
	0.75	Flexible	0.6	1.4	20.0	26.0	0.0114	461	300/D
	1	Flexible	0.6	1.4	20.5	19.5	0.0104	546	300/D
	1.5	Flexible	0.6	1.4	22.0	13.3	0.0089	660	300/D
	2.5	Flexible	0.7	1.8	26.5	7.98	0.0081	1062	300/D
	4	Flexible	0.8	1.8	32.0	4.95	0.0076	1579	300/D
25	0.5	Flexible	0.6	2.2	37.5	3.30	0.0061	2316	300/D
	0.75	Flexible	0.6	1.4	18.5	39.0	0.0130	388	300/D
	1	Flexible	0.6	1.4	20.0	26.0	0.0114	473	300/D
	1.5	Flexible	0.6	1.4	20.5	19.5	0.0104	560	300/D
	2.5	Flexible	0.6	1.4	22.0	13.3	0.0089	679	300/D
	2.5	Flexible	0.7	1.8	26.5	7.98	0.0081	1093	300/D
26	4	Flexible	0.8	1.8	32.0	4.95	0.0076	1628	300/D
	6	Flexible	0.8	2.2	37.5	3.30	0.0061	2389	300/D
	0.5	Flexible	0.6	1.4	18.5	39.0	0.0130	397	300/D
	0.75	Flexible	0.6	1.4	20.0	26.0	0.0114	485	300/D
	1	Flexible	0.6	1.4	20.5	19.5	0.0104	576	300/D
	1.5	Flexible	0.6	1.4	22.0	13.3	0.0089	699	300/D
27	2.5	Flexible	0.7	1.8	26.5	7.98	0.0081	1124	300/D
	4	Flexible	0.8	1.8	32.0	4.95	0.0076	1678	300/D
	6	Flexible	0.8	2.2	37.5	3.30	0.0061	2465	300/D
	0.5	Flexible	0.6	1.4	19.0	39.0	0.0130	407	300/D
	0.75	Flexible	0.6	1.4	20.5	26.0	0.0114	497	300/D
	1	Flexible	0.6	1.4	21.0	19.5	0.0104	592	300/D
28	1.5	Flexible	0.6	1.4	22.5	13.3	0.0089	717	300/D
	2.5	Flexible	0.7	1.8	27.5	7.98	0.0081	1153	300/D
	4	Flexible	0.8	1.8	33.0	4.95	0.0076	1725	300/D
	6	Flexible	0.8	2.2	38.5	3.30	0.0061	2531	300/D
	0.5	Flexible	0.6	1.4	19.5	39.0	0.0130	432	300/D
	0.75	Flexible	0.6	1.4	21.0	26.0	0.0114	529	300/D
29	1	Flexible	0.6	1.4	21.5	19.5	0.0104	629	300/D
	1.5	Flexible	0.6	1.4	23.5	13.3	0.0089	778	300/D
	2.5	Flexible	0.7	1.8	28.5	7.98	0.0081	1228	300/D
	4	Flexible	0.8	1.8	34.0	4.95	0.0076	1835	300/D
	6	Flexible	0.8	2.2	40.0	3.30	0.0061	2690	300/D
	0.5	Flexible	0.6	1.4	19.5	39.0	0.0130	430	300/D
30	0.75	Flexible	0.6	1.4	21.0	26.0	0.0114	528	300/D
	1	Flexible	0.6	1.4	21.5	19.5	0.0104	628	300/D
	1.5	Flexible	0.6	1.4	23.5	13.3	0.0089	777	300/D
	2.5	Flexible	0.7	1.8	28.5	7.98	0.0081	1229	300/D
	4	Flexible	0.8	1.8	34.0	4.95	0.0076	1841	300/D
	6	Flexible	0.8	2.2	40.0	3.30	0.0061	2704	300/D
31	0.5	Flexible	0.6	1.4	19.5	39.0	0.0130	440	300/D
	0.75	Flexible	0.6	1.4	21.0	26.0	0.0114	540	300/D
	1	Flexible	0.6	1.4	21.5	19.5	0.0104	644	300/D
	1.5	Flexible	0.6	1.4	23.5	13.3	0.0089	796	300/D
	2.5	Flexible	0.7	1.8	28.5	7.98	0.0081	1260	300/D
	4	Flexible	0.8	1.8	34.0	4.95	0.0076	1892	300/D
32	6	Flexible	0.8	2.2	40.0	3.30	0.0061	2779	300/D
	0.5	Flexible	0.6	1.4	20.5	39.0	0.0130	468	300/D
	0.75	Flexible	0.6	1.4	21.5	26.0	0.0114	574	300/D
	1	Flexible	0.6	1.4	22.5	19.5	0.0104	686	300/D
	1.5	Flexible	0.6	1.4	24.5	13.3	0.0089	846	300/D
	2.5	Flexible	0.7	1.8	29.5	7.98	0.0081	1338	300/D
33	4	Flexible	0.8	1.8	35.0	4.95	0.0076	2006	300/D
	6	Flexible	0.8	2.2	41.5	3.30	0.0061	2945	300/D
	0.5	Flexible	0.6	1.4	20.5	39.0	0.0130	465	300/D
	0.75	Flexible	0.6	1.4	21.5	26.0	0.0114	573	300/D
	1	Flexible	0.6	1.4	22.5	19.5	0.0104	685	300/D
	1.5	Flexible	0.6	1.4	24.5	13.3	0.0089	845	300/D
34	2.5	Flexible	0.7	1.8	29.5	7.98	0.0081	1339	300/D
	4	Flexible	0.8	1.8	35.0	4.95	0.0076	2012	300/D
	6	Flexible	0.8	2.2	41.5	3.30	0.0061	2958	300/D

B

CVV or CVV-S

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH WITH SHIELD CONTROL CABLE

Number of cores	Normal cross sectional area (mm ²)	Conductor type	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ω/km)	Insulation resistance at 70°C minimum (MΩ·km)	Cable weight approx. (kg/km)	Standard Length (m)
33	0.5	Flexible	0.6	1.4	20.5	39.0	0.0130	475	300/D
	0.75	Flexible	0.6	1.4	21.5	26.0	0.0114	585	300/D
	1	Flexible	0.6	1.4	22.5	19.5	0.0104	700	300/D
	1.5	Flexible	0.6	1.4	24.5	13.3	0.0089	865	300/D
	2.5	Flexible	0.7	1.8	29.5	7.98	0.0081	1370	300/D
	4	Flexible	0.8	1.8	35.0	4.95	0.0076	2063	300/D
34	6	Flexible	0.8	2.2	41.5	3.30	0.0061	3034	300/D
	0.5	Flexible	0.6	1.4	21.0	39.0	0.0130	504	300/D
	0.75	Flexible	0.6	1.4	22.5	26.0	0.0114	619	300/D
	1	Flexible	0.6	1.4	23.0	19.5	0.0104	752	300/D
	1.5	Flexible	0.6	1.8	26.0	13.3	0.0089	964	300/D
	2.5	Flexible	0.7	1.8	30.5	7.98	0.0081	1449	300/D
35	4	Flexible	0.8	2.2	37.5	4.95	0.0076	2241	300/D
	0.5	Flexible	0.6	1.4	21.0	39.0	0.0130	501	300/D
	0.75	Flexible	0.6	1.4	22.5	26.0	0.0114	617	300/D
	1	Flexible	0.6	1.4	23.0	19.5	0.0104	752	300/D
	1.5	Flexible	0.6	1.8	26.0	13.3	0.0089	964	300/D
	2.5	Flexible	0.7	1.8	30.5	7.98	0.0081	1449	300/D
36	4	Flexible	0.8	2.2	37.5	4.95	0.0076	2248	300/D
	0.5	Flexible	0.6	1.4	21.0	39.0	0.0130	511	300/D
	0.75	Flexible	0.6	1.4	22.5	26.0	0.0114	629	300/D
	1	Flexible	0.6	1.4	23.0	19.5	0.0104	767	300/D
	1.5	Flexible	0.6	1.8	26.0	13.3	0.0089	983	300/D
	2.5	Flexible	0.7	1.8	30.5	7.98	0.0081	1481	300/D
37	4	Flexible	0.8	2.2	37.5	4.95	0.0076	2298	300/D
	0.5	Flexible	0.6	1.4	21.0	39.0	0.0130	518	300/D
	0.75	Flexible	0.6	1.4	22.5	26.0	0.0114	640	300/D
	1	Flexible	0.6	1.4	23.0	19.5	0.0104	780	300/D
	1.5	Flexible	0.6	1.8	26.0	13.3	0.0089	1000	300/D
	2.5	Flexible	0.7	1.8	30.5	7.98	0.0081	1507	300/D
38	4	Flexible	0.8	2.2	37.5	4.95	0.0076	2341	300/D
	0.5	Flexible	0.6	1.4	21.5	39.0	0.0130	535	300/D
	0.75	Flexible	0.6	1.4	23.0	26.0	0.0114	661	300/D
	1	Flexible	0.6	1.4	23.5	19.5	0.0104	804	300/D
	1.5	Flexible	0.6	1.8	26.5	13.3	0.0089	1032	300/D
	2.5	Flexible	0.7	1.8	31.0	7.98	0.0081	1556	300/D
39	4	Flexible	0.8	2.2	38.0	4.95	0.0076	2418	300/D
	0.5	Flexible	0.6	1.4	22.0	39.0	0.0130	547	300/D
	0.75	Flexible	0.6	1.4	23.0	26.0	0.0114	675	300/D
	1	Flexible	0.6	1.4	24.0	19.5	0.0104	823	300/D
	1.5	Flexible	0.6	1.8	27.0	13.3	0.0089	1056	300/D
	2.5	Flexible	0.7	1.8	31.5	7.98	0.0081	1593	300/D
40	4	Flexible	0.8	2.2	39.0	4.95	0.0076	2475	300/D
	0.5	Flexible	0.6	1.4	22.0	39.0	0.0130	554	300/D
	0.75	Flexible	0.6	1.4	23.0	26.0	0.0114	685	300/D
	1	Flexible	0.6	1.4	24.0	19.5	0.0104	836	300/D
	1.5	Flexible	0.6	1.8	27.0	13.3	0.0089	1072	300/D
	2.5	Flexible	0.7	1.8	31.5	7.98	0.0081	1619	300/D
41	4	Flexible	0.8	2.2	39.0	4.95	0.0076	2520	300/D
	0.5	Flexible	0.6	1.4	22.5	39.0	0.0130	575	300/D
	0.75	Flexible	0.6	1.4	24.0	26.0	0.0114	723	300/D
	1	Flexible	0.6	1.8	26.0	19.5	0.0104	918	300/D
	1.5	Flexible	0.6	1.8	28.0	13.3	0.0089	1112	300/D
	2.5	Flexible	0.7	1.8	32.5	7.98	0.0081	1677	300/D
	4	Flexible	0.8	2.2	40.0	4.95	0.0076	2604	300/D

D = Packing in drum

CVV or CVV-S

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE 600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH WITH SHIELD CONTROL CABLE

Number of cores	Nominal cross sectional area (mm ²)	Conductor type	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter approx. (mm)	Conductor resistance at 20°C maximum (Ω/km)	Insulation resistance at 70°C minimum (MΩ·km)	Cable weight approx. (kg/km)	Standard Length (m)
42	0.5	Flexible	0.6	1.4	22.5	39.0	0.0130	584	300/D
	0.75	Flexible	0.6	1.4	24.0	26.0	0.0114	736	300/D
	1	Flexible	0.6	1.8	26.0	19.5	0.0104	933	300/D
	1.5	Flexible	0.6	1.8	28.0	13.3	0.0089	1130	300/D
	2.5	Flexible	0.7	1.8	32.5	7.98	0.0081	1708	300/D
	4	Flexible	0.8	2.2	40.0	4.95	0.0076	2654	300/D
43	0.5	Flexible	0.6	1.4	22.5	39.0	0.0130	591	300/D
	0.75	Flexible	0.6	1.4	24.0	26.0	0.0114	745	300/D
	1	Flexible	0.6	1.8	26.0	19.5	0.0104	945	300/D
	1.5	Flexible	0.6	1.8	28.0	13.3	0.0089	1146	300/D
	2.5	Flexible	0.7	1.8	32.5	7.98	0.0081	1736	300/D
	4	Flexible	0.8	2.2	40.0	4.95	0.0076	2701	300/D
44	0.5	Flexible	0.6	1.4	23.5	39.0	0.0130	609	300/D
	0.75	Flexible	0.6	1.8	26.0	26.0	0.0114	816	300/D
	1	Flexible	0.6	1.8	26.5	19.5	0.0104	970	300/D
	1.5	Flexible	0.6	1.8	29.0	13.3	0.0089	1178	300/D
	2.5	Flexible	0.7	1.8	34.0	7.98	0.0081	1782	300/D
45	0.5	Flexible	0.6	1.4	23.5	39.0	0.0130	618	300/D
	0.75	Flexible	0.6	1.8	26.0	26.0	0.0114	828	300/D
	1	Flexible	0.6	1.8	26.5	19.5	0.0104	986	300/D
	1.5	Flexible	0.6	1.8	29.0	13.3	0.0089	1197	300/D
	2.5	Flexible	0.7	1.8	34.0	7.98	0.0081	1813	300/D
46	0.5	Flexible	0.6	1.4	23.5	39.0	0.0130	628	300/D
	0.75	Flexible	0.6	1.8	26.0	26.0	0.0114	841	300/D
	1	Flexible	0.6	1.8	26.5	19.5	0.0104	1001	300/D
	1.5	Flexible	0.6	1.8	29.0	13.3	0.0089	1217	300/D
	2.5	Flexible	0.7	1.8	34.0	7.98	0.0081	1844	300/D
47	0.5	Flexible	0.6	1.4	23.5	39.0	0.0130	637	300/D
	0.75	Flexible	0.6	1.8	26.0	26.0	0.0114	853	300/D
	1	Flexible	0.6	1.8	26.5	19.5	0.0104	1016	300/D
	1.5	Flexible	0.6	1.8	29.0	13.3	0.0089	1236	300/D
	2.5	Flexible	0.7	1.8	34.0	7.98	0.0081	1876	300/D
48	0.5	Flexible	0.6	1.4	24.0	39.0	0.0130	659	300/D
	0.75	Flexible	0.6	1.8	26.5	26.0	0.0114	866	300/D
	1	Flexible	0.6	1.8	27.0	19.5	0.0104	1034	300/D
	1.5	Flexible	0.6	1.8	29.5	13.3	0.0089	1256	300/D
	2.5	Flexible	0.7	1.8	34.5	7.98	0.0081	1905	300/D

D = Packing in drum

This table show only flexible stranded conductor. If you want to have solid or concentric conductor type, please contact with our sales department for CW-S. The overall diameter of cable and cable weight shall be change a little bit more.


*Remark : Special protection can be produce.

CVV or CVV-S

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH WITH SHIELD CONTROL CABLE

ARRANGEMENT OF CORES FOR CW or CW-S

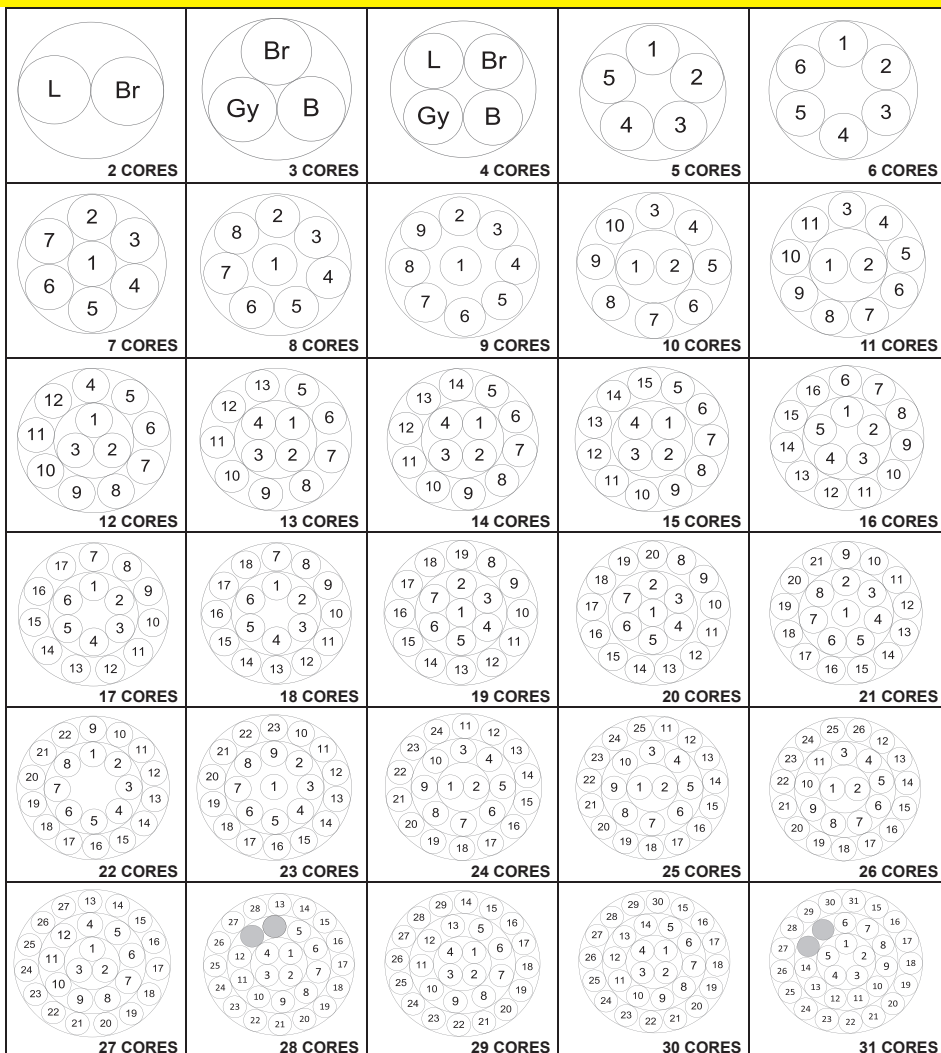


NOTE : Fillers are necessary to fill the cable a substantially circular cross section.
(If the stranded cores be circle enough, fillers shall not be necessary)

CVV or CVV-S

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH CONTROL CABLE

600 V 70°C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH WITH SHIELD CONTROL CABLE

ARRANGEMENT OF CORES FOR CW or CW-S

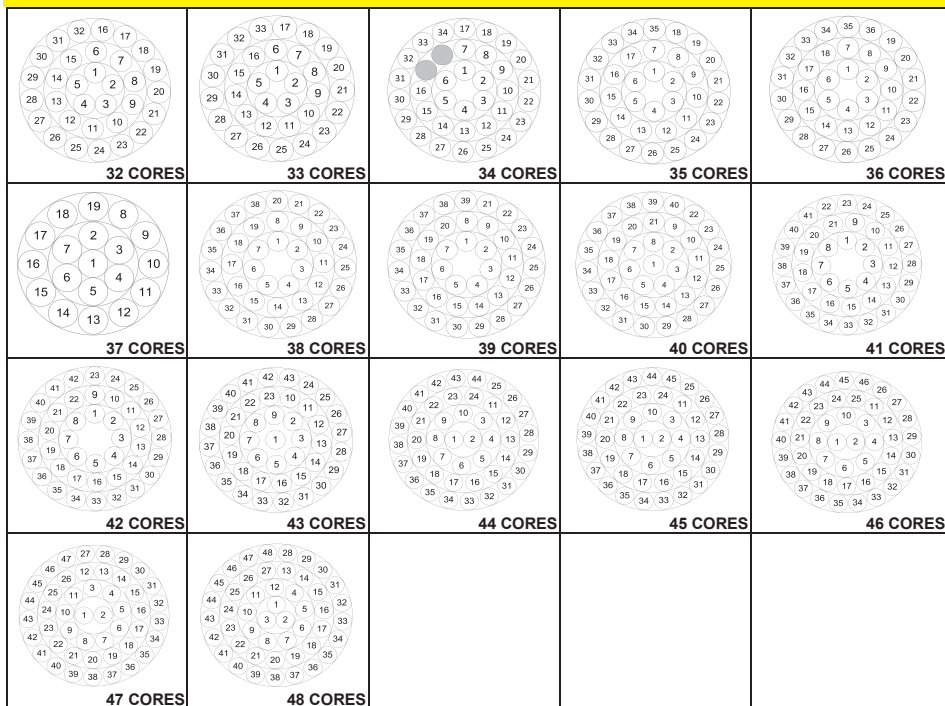

NOTE : Fillers are necessary to fill the cable a substantially circular cross section.
(If the stranded cores be circle enough, fillers shall not be necessary)

B